

Specialty metals for the performance racing industry

Grades and applications

Application	Tool steel grades	Alternative Upgrade material.
Camshafts	A2	PSB27 or PMM4
Roller Cams	A2	PSB27
Transmission Output Shafts	4140	PSB27
Lifters/flat Tappets Lifters	M2	PMM4
Roller Lifters	M2	PMM4
Bearings	M2	PMM4
Wrist Pins	H13, M2	H13 ESR, PSB67, PMM4

Grades	Flat sizes available	Round sizes available
A2	0.25" thru 8" thick	0.25" thru 8.0Dia.
PSB27	0.103" thru 6" thick	0.75" thru 12.0" Dia.
PMM4	0.10" thru 12" thick	0.375" thru 12.0Dia.
4140	TFHT - 0.25" thru 6" thick	HRHT 0.50" thru 11.0Dia.
H13	0.375" thru 8" thick	0.375" thru 11.0Dia.
H13 ESR	4.0" thru 8" thick	0.75" thru 11.0Dia.
M2	0.04" thru 3" thick	0.109" thru 10.125" Dia.
PSB67	N/A	1.0" thru 12.0" Dia

Click on red box to go open Technical data sheet.



A product of SB Specialty Metals LLC

- PSB27 is a Spray Form tool steel with up to 3X the wear resistance of D2.







SB Specialty Metals LLC

Your **First Choice** for Specialty Metals

Comparison chart of grades available from SBSM

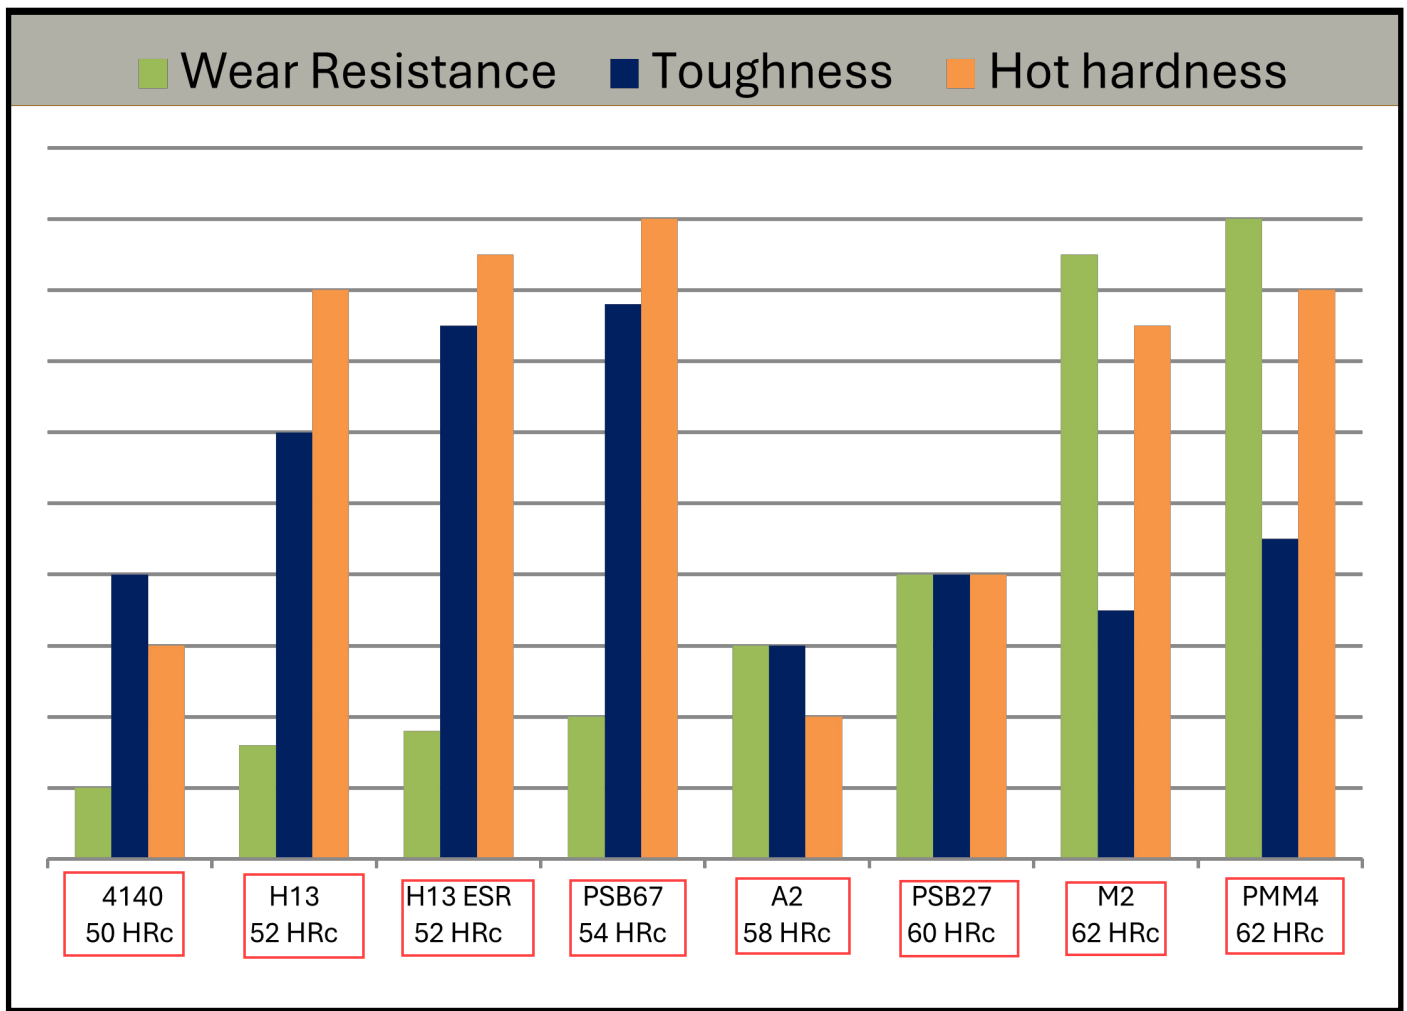

 Click on red box to go open Technical data sheet.